



Photo Parameters

Flux = 413 lm Eff. : 56.1 lm/W F CRI=98

Polar curve / Diagrama Polar

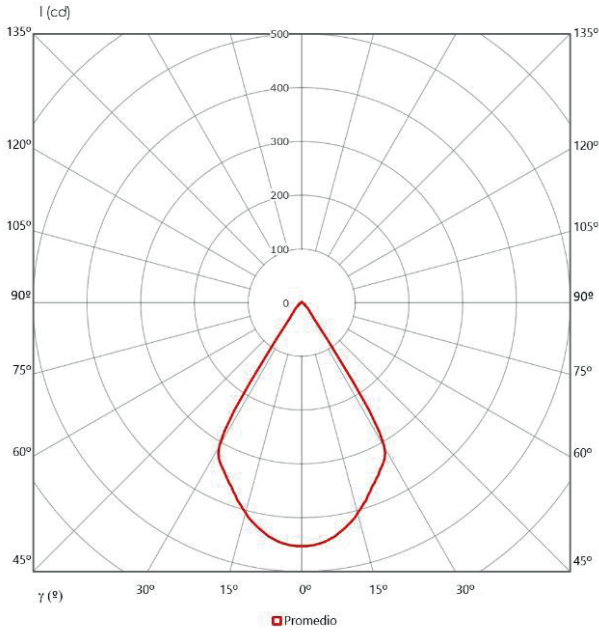

Conical curve / Diagrama Cónico

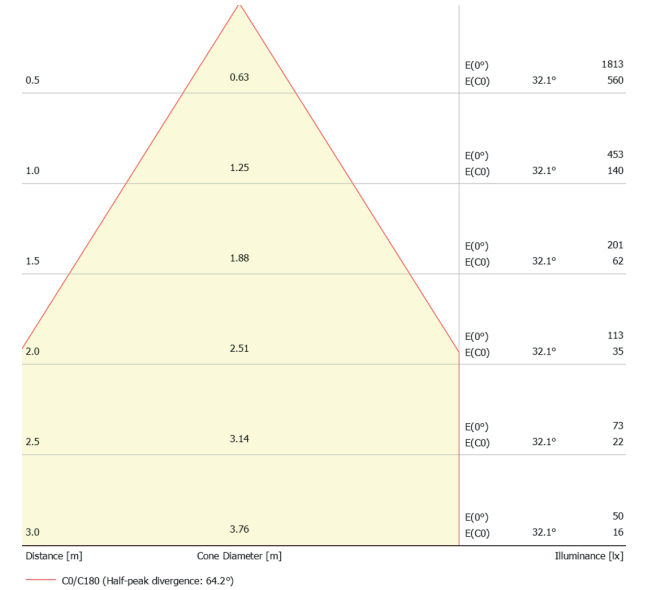

UGR

Glare evaluation according to UGR

ρ Ceiling	70	70	50	50	30	70	70	50	50	30
ρ Walls	50	30	50	30	30	50	30	50	30	30
ρ Floor	20	20	20	20	20	20	20	20	20	20

Room size X	Y	Viewing direction at right angles					Viewing direction parallel				
		2H	3H	4H	6H	8H	2H	3H	4H	6H	8H
2H	2H	12.6	13.3	12.8	13.5	13.7	12.6	13.3	12.8	13.5	13.7
2H	3H	12.5	13.1	12.8	13.3	13.6	12.5	13.1	12.8	13.3	13.6
2H	4H	12.4	13.0	12.7	13.2	13.5	12.4	13.0	12.7	13.2	13.5
2H	6H	12.3	12.8	12.6	13.1	13.4	12.3	12.8	12.6	13.1	13.4
2H	8H	12.3	12.8	12.6	13.1	13.4	12.3	12.8	12.6	13.1	13.4
2H	12H	12.2	12.7	12.6	13.0	13.4	12.2	12.7	12.6	13.0	13.4
4H	2H	12.4	13.0	12.7	13.3	13.5	12.4	13.0	12.7	13.3	13.5
4H	3H	12.3	12.8	12.6	13.1	13.4	12.3	12.8	12.6	13.1	13.4
4H	4H	12.2	12.6	12.6	13.0	13.3	12.2	12.6	12.6	13.0	13.3
4H	6H	12.1	12.5	12.5	12.9	13.3	12.1	12.5	12.5	12.9	13.3
4H	8H	12.1	12.4	12.5	12.8	13.2	12.1	12.4	12.5	12.8	13.2
4H	12H	12.1	12.3	12.5	12.7	13.2	12.1	12.3	12.5	12.7	13.2
8H	4H	12.1	12.4	12.5	12.8	13.2	12.1	12.4	12.5	12.8	13.2
8H	6H	12.0	12.2	12.5	12.7	13.1	12.0	12.2	12.5	12.7	13.1
8H	8H	12.0	12.2	12.4	12.6	13.1	12.0	12.2	12.4	12.6	13.1
8H	12H	11.9	12.1	12.4	12.5	13.1	11.9	12.1	12.4	12.5	13.1
12H	4H	12.1	12.3	12.5	12.7	13.2	12.1	12.3	12.5	12.7	13.2
12H	6H	12.0	12.1	12.4	12.6	13.1	12.0	12.1	12.4	12.6	13.1
12H	8H	11.9	12.1	12.4	12.5	13.1	11.9	12.1	12.4	12.5	13.1

Variation of the observer position for the luminaire distance S

S = 1.0H	+6.5 / -9.3	+6.5 / -9.3
S = 1.5H	+9.3 / -8.7	+9.3 / -8.7
S = 2.0H	+11.2 / -16.7	+11.2 / -16.7
Standard table	BK00	BK00
Correction summand	-6.1	-6.1

Corrected glare indices referring to 413 lm total luminous flux