



Photo Parameters

Flux = 540 lm Eff. : 73.0 lm/W CRI=90

Polar curve / Diagrama Polar

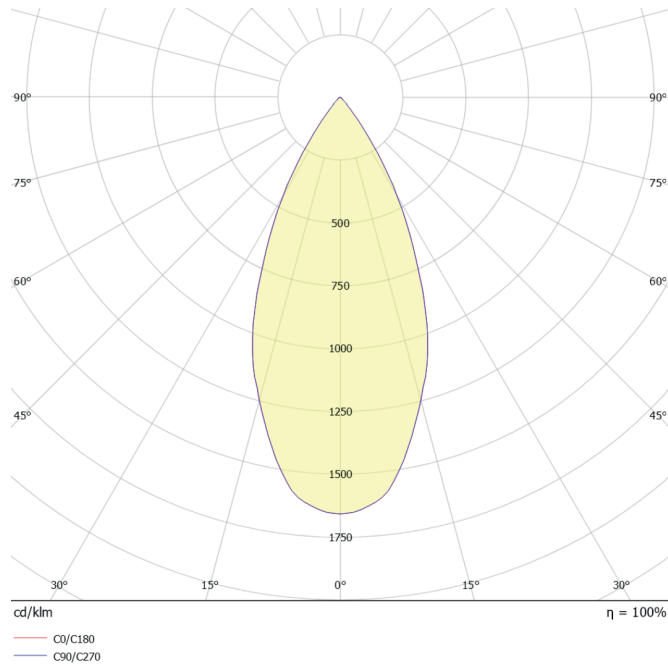

Cone diagram / Diagrama Cónico

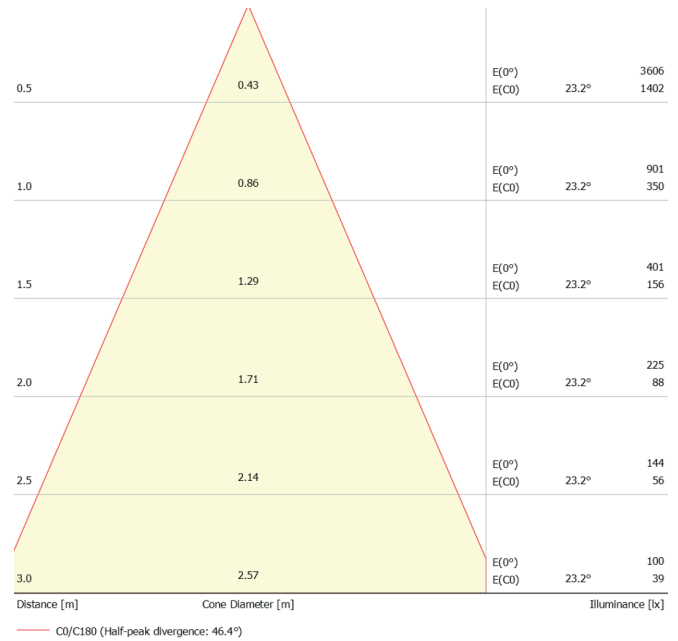

UGR

Glare evaluation according to UGR

ρ Ceiling		70	70	50	50	30	70	70	50	50	30
ρ Walls		50	30	50	30	30	50	30	50	30	30
ρ Floor		20	20	20	20	20	20	20	20	20	20
Room size X	Y	Viewing direction at right angles					Viewing direction parallel				
2H	2H	24.1	24.7	24.3	24.9	25.1	24.1	24.7	24.3	24.9	25.1
2H	3H	24.0	24.6	24.3	24.8	25.0	24.0	24.6	24.3	24.8	25.0
2H	4H	23.9	24.5	24.2	24.8	25.0	23.9	24.5	24.2	24.8	25.0
2H	6H	23.9	24.4	24.2	24.7	25.0	23.9	24.4	24.2	24.7	25.0
2H	8H	23.9	24.4	24.2	24.7	25.0	23.9	24.4	24.2	24.7	25.0
2H	12H	23.8	24.3	24.2	24.6	24.9	23.8	24.3	24.2	24.6	24.9
4H	2H	23.9	24.5	24.2	24.7	25.0	23.9	24.5	24.2	24.7	25.0
4H	3H	23.8	24.3	24.1	24.6	24.9	23.8	24.3	24.1	24.6	24.9
4H	4H	23.8	24.2	24.1	24.5	24.8	23.8	24.2	24.1	24.5	24.8
4H	6H	23.8	24.1	24.2	24.4	24.8	23.8	24.1	24.2	24.4	24.8
4H	8H	23.7	24.0	24.1	24.4	24.8	23.7	24.0	24.1	24.4	24.8
4H	12H	23.7	24.0	24.1	24.4	24.8	23.7	24.0	24.1	24.4	24.8
8H	4H	23.7	24.0	24.1	24.4	24.8	23.7	24.0	24.1	24.4	24.8
8H	6H	23.7	23.9	24.1	24.3	24.8	23.7	23.9	24.1	24.3	24.8
8H	8H	23.7	23.8	24.1	24.3	24.7	23.7	23.8	24.1	24.3	24.7
8H	12H	23.6	23.8	24.1	24.2	24.7	23.6	23.8	24.1	24.2	24.7
12H	4H	23.7	23.9	24.1	24.3	24.7	23.7	23.9	24.1	24.3	24.7
12H	6H	23.6	23.8	24.1	24.3	24.7	23.6	23.8	24.1	24.3	24.7
12H	8H	23.6	23.8	24.1	24.2	24.7	23.6	23.8	24.1	24.2	24.7

Variation of the observer position for the luminaire distance S

S = 1.0H S = 1.5H S = 2.0H	+5.7 / -8.6 +8.5 / -8.9 +10.5 / -9.1	+5.7 / -8.6 +8.5 / -8.9 +10.5 / -9.1
Standard table	BK00	BK00
Correction summand	5.5	5.5

Corrected glare indices referring to 543 lm total luminous flux